


Vent Hood Wall Mounting Instructions

1. Remove bottom vent hood panels or vent hood insert
2. Determine location of wall mounting holes and drill holes-drill holes close to edges of back wall when possible
3. Attach vent hood duct to ceiling/wall duct
4. Attach vent hood to wall using a minimum of ten anchors of appropriate type for wall material/substrate, including the internal fan mounting bracket if applicable
5. Either connect vent hood power cable to J-box in wall/ceiling or bring in customer supplied power cable to vent hood junction box on center panel
6. If hood uses a remote blower, then connect blower power cable to remote blower or blower cable in wall/ceiling
7. Reinstall Center Panel(s). Connect duct to center panel or multi-panel manifold if needed.
8. If needed, connect power cable/blower cable to switches in center panel junction box
9. Connect side panel down light wires to matching wires from center panel junction box
10. Reinstall side panels
11. Install down light bezel covers

Finish Care for your Texas Lightsmith Vent Hood:

Most stainless steel appliance and countertop sprays found at Home Depot, Lowes and many grocery stores are a good choice for cleaning your vent hood. They leave a nice luster in addition to cleaning the surface and leaving an additional layer of protection. While standard cleaners such as 409 and Fantastic are fine, they tend to leave a slightly dull finish. When cleaning or wiping down your vent hood, use only a soft cloth. Even paper towels, over time, will wear through the sealant. Always avoid the use of abrasives and strong cleaners.

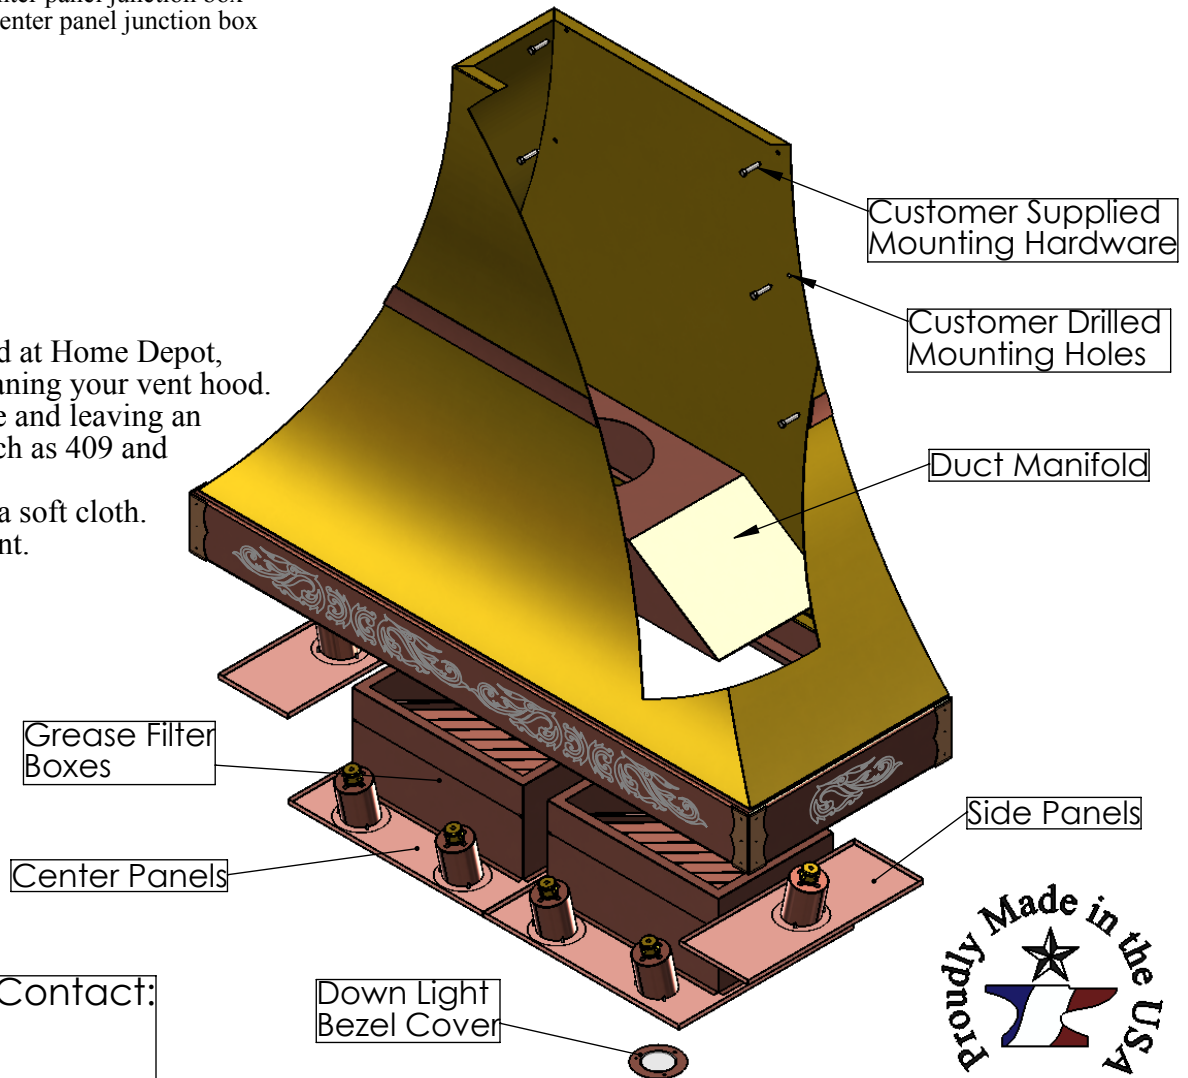

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Texas Lightsmith. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
Texas Lightsmith IS
PROHIBITED.

For Installation Questions Contact:
Texas Lightsmith
877-268-2266
www.texaslightsmith.com

